


A70/NRM - Style Outer Turn-up Bladders

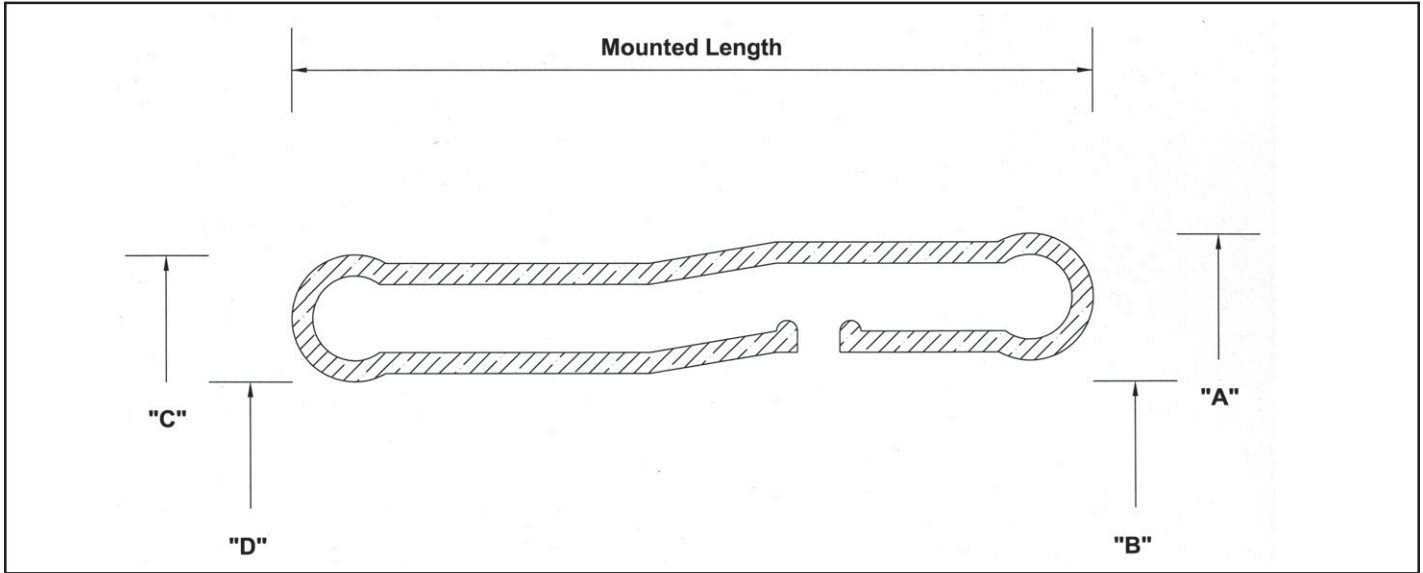

Catalog Number	Tire Rim Diameter	Mounted Length		Total Length		Front OD "A"		Front ID "B"		Rear OD "C"		Rear ID "D"		Release Surface Texture
	Inches	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	
AQR1E	12	8.00	203	15.56	395	10.30	262	9.40	239	9.1	231	8.25	210	Rippled
AQS1E	12	8.00	203	15.56	395	10.30	262	9.40	239	9.1	231	8.25	210	Smooth
BQR1E	13	8.00	203	15.56	395	11.75	298	10.65	271	10.1	257	9.25	235	Rippled
BQS1E	13	8.00	203	15.56	395	11.75	298	10.65	271	10.1	257	9.25	235	Smooth
BTR1E	13	9.25	235	18.08	459	11.75	298	10.65	271	10.1	257	9.25	235	Rippled
BTS1E	13	9.25	235	18.08	459	11.75	298	10.65	271	10.1	257	9.25	235	Smooth
BTR1N	13	9.25	235	18.08	459	11.30	287	10.40	264	10.1	257	9.25	235	Rippled
BTS1N	13	9.25	235	18.08	459	11.30	287	10.40	264	10.1	257	9.25	235	Smooth
CQR1E	14	8.00	203	15.56	395	12.75	324	11.65	296	11.1	282	10.25	260	Rippled
CQS1E	14	8.00	203	15.56	395	12.75	324	11.65	296	11.1	282	10.25	260	Smooth
CTR1E	14	9.25	235	18.08	459	12.75	324	11.40	290	11.1	282	10.25	260	Rippled
CTS1E	14	9.25	235	18.08	459	12.75	324	11.40	290	11.1	282	10.25	260	Smooth
CTR1N	14	9.25	235	18.08	459	12.30	312	11.40	290	11.1	282	10.25	260	Rippled
CTS1N	14	9.25	235	18.08	459	12.30	312	11.40	290	11.1	282	10.25	260	Smooth
CUR1E	14	10.75	273	21.08	535	12.75	324	11.65	296	11.1	282	10.25	260	Rippled
CUS1E	14	10.75	273	21.08	535	12.75	324	11.65	296	11.1	282	10.25	260	Smooth
CUR1N	14	10.75	273	21.08	535	12.30	312	11.40	290	11.1	282	10.25	260	Rippled
CUS1N	14	10.75	273	21.08	535	12.30	312	11.40	290	11.1	282	10.25	260	Smooth