


A70/NRM - Style Outer Turn-up Bladders

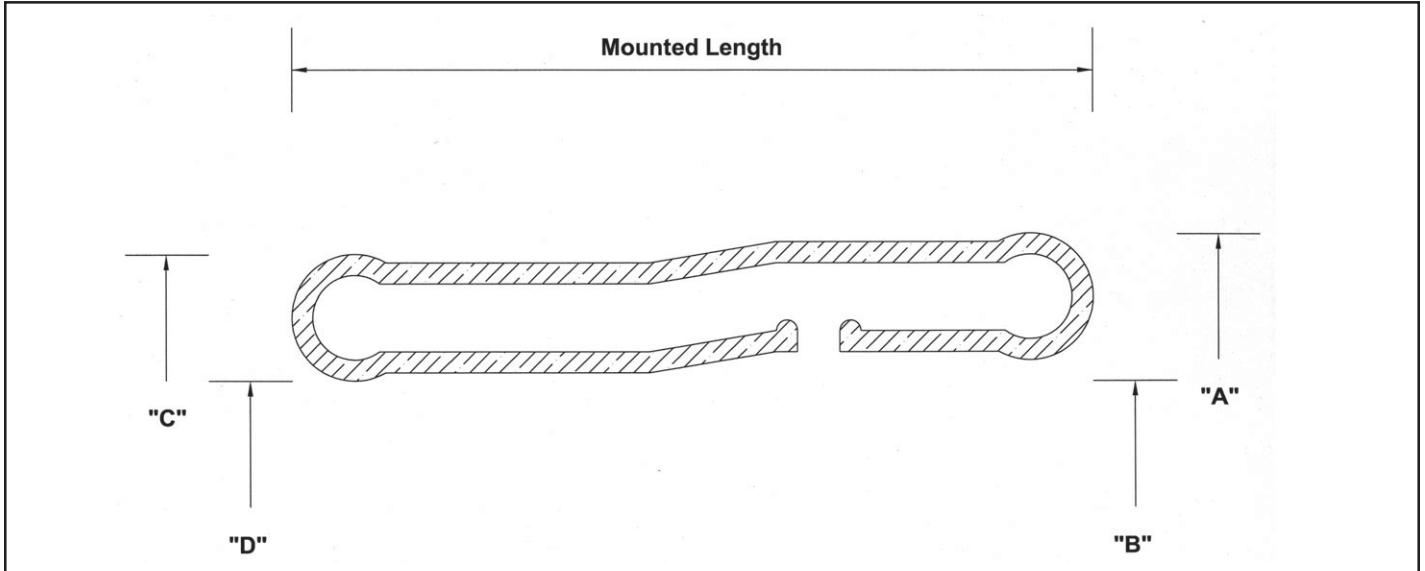

Catalog Number	Tire Rim Diameter	Mounted Length		Total Length		Front OD "A"		Front ID "B"		Rear OD "C"		Rear ID "D"		Release Surface Texture
	Inches	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	
DQR1E	15	8.00	203	15.56	395	13.75	349	12.65	321	12.1	307	11.25	286	Rippled
DQS1E	15	8.00	203	15.56	395	13.75	349	12.65	321	12.1	307	11.25	286	Smooth
DTR1E	15	9.25	235	18.08	459	13.75	349	12.65	321	12.1	307	11.25	286	Rippled
DTS1E	15	9.25	235	18.08	459	13.75	349	12.65	321	12.1	307	11.25	286	Smooth
DTR1N	15	9.25	235	18.08	459	13.30	338	12.40	315	12.1	307	11.25	286	Rippled
DTS1N	15	9.25	235	18.08	459	13.30	338	12.40	315	12.1	307	11.25	286	Smooth
DUR1E	15	10.75	273	21.08	535	13.75	349	12.65	321	12.1	307	11.25	286	Rippled
DUS1E	15	10.75	273	21.08	535	13.75	349	12.65	321	12.1	307	11.25	286	Smooth
DUR1N	15	10.75	273	21.08	535	13.30	338	12.40	315	12.1	307	11.25	286	Rippled
DUS1N	15	10.75	273	21.08	535	13.30	338	12.40	315	12.1	307	11.25	286	Smooth
FQR1E	16	8.00	203	15.56	395	14.75	375	13.65	347	13.1	333	12.25	311	Rippled
FQS1E	16	8.00	203	15.56	395	14.75	375	13.65	347	13.1	333	12.25	311	Smooth
FTR1E	16	9.25	235	18.08	459	14.75	375	13.65	347	13.1	333	12.25	311	Rippled
FTS1E	16	9.25	235	18.08	459	14.75	375	13.65	347	13.1	333	12.25	311	Smooth
FTR1N	16	9.25	235	18.08	459	14.30	363	13.40	340	13.1	333	12.25	311	Rippled
FTS1N	16	9.25	235	18.08	459	14.30	363	13.40	340	13.1	333	12.25	311	Smooth
FUR1E	16	10.75	273	21.08	535	14.75	375	13.65	347	13.1	333	12.25	311	Rippled
FUS1E	16	10.75	273	21.08	535	14.75	375	13.65	347	13.1	333	12.25	311	Smooth
FUR1N	16	10.75	273	21.08	535	14.30	363	13.40	340	13.1	333	12.25	311	Rippled
FUS1N	16	10.75	273	21.08	535	14.30	363	13.40	340	13.1	333	12.25	311	Smooth