


A70/NRM - Style Outer Turn-up Bladders

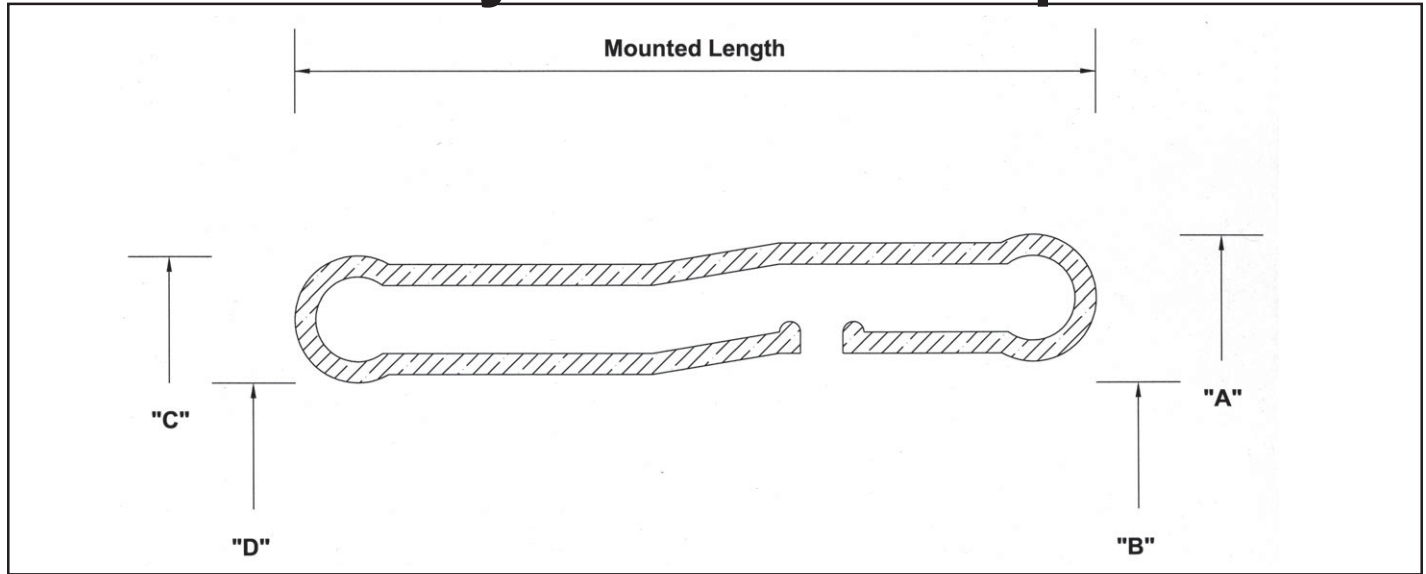

Catalog Number	Tire Rim Diameter	Mounted Length		Total Length		Front OD "A"		Front ID "B"		Rear OD "C"		Rear ID "D"		Release Surface Texture
	Inches	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	
GQR1E	17	8.00	203	15.56	395	15.75	400	14.65	372	14.1	358	13.25	337	Rippled
GQS1E	17	8.00	203	15.56	395	15.75	400	14.65	372	14.1	358	13.25	337	Smooth
GTR1E	17	9.25	235	18.08	459	15.75	400	14.65	372	14.1	358	13.25	337	Rippled
GTS1E	17	9.25	235	18.08	459	15.75	400	14.65	372	14.1	358	13.25	337	Smooth
GTR1N	17	9.25	235	18.08	459	15.30	389	14.40	366	14.1	358	13.25	337	Rippled
GTS1N	17	9.25	235	18.08	459	15.30	389	14.40	366	14.1	358	13.25	337	Smooth
GUR1E	17	10.75	273	21.08	535	15.75	400	14.65	372	14.1	358	13.25	337	Rippled
GUS1E	17	10.75	273	21.08	535	15.75	400	14.65	372	14.1	358	13.25	337	Smooth
GUR1N	17	10.75	273	21.08	535	15.30	389	14.40	366	14.1	358	13.25	337	Rippled
GUS1N	17	10.75	273	21.08	535	15.30	389	14.40	366	14.1	358	13.25	337	Smooth
JQR1E	19	8.00	203	15.56	395	17.75	451	16.65	423	16.1	409	15.25	387	Rippled
JQS1E	19	8.00	203	15.56	395	17.75	451	16.65	423	16.1	409	15.25	387	Smooth
JTR1N	19	9.25	235	18.08	495	17.30	439	16.40	417	16.1	409	15.25	387	Rippled
JTS1N	19	9.25	235	18.08	495	17.30	439	16.40	417	16.1	409	15.25	387	Smooth
JUR1N	19	10.75	273	21.08	535	17.30	439	16.40	417	16.1	409	15.25	387	Smooth
JUS1N	19	10.75	273	21.08	535	17.30	439	16.65	417	16.1	409	15.25	387	Rippled
KWR1N	20	12.00	305	23.56	598	18.30	465	17.40	442	17.1	434	16.25	413	Rippled
KWS1N	20	12.00	305	23.56	598	18.30	465	17.40	442	17.1	434	16.25	413	Smooth
LWR1N	22	12.00	305	23.56	598	20.30	516	19.40	493	19.1	485	18.25	464	Rippled
LWS1N	22	12.00	305	23.56	598	20.30	516	19.40	493	19.1	485	18.25	464	Smooth
PWR1N	24	12.00	305	23.56	598	22.30	566	21.40	544	21.1	536	20.25	514	Rippled
PWS1N	24	12.00	305	23.56	598	22.30	566	21.40	544	21.1	536	20.25	514	Smooth